

CANTON SERIES CA-GLASS

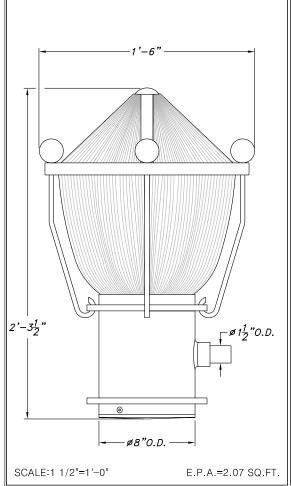

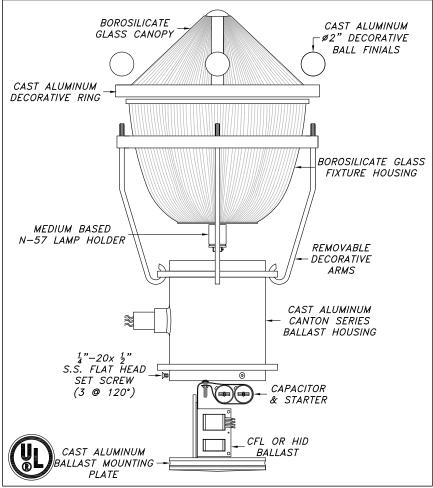

<u>EXAMPLE</u>
CA-GLASS-PSMH-150-208-V-BLK

INC 150w 150w 120v MULITAP TYPE III (BLK) BLACK (HG) HAND BE	SOURCE	DISTRIBUTION COLOR OF POWDER COAT FINISH
U GFL	☐ CFL ☐ HPS ☐ PSMH	☐ (BRZ) BRONZE ☐ (HR) HAND BRUSHED GRAY

LUMINAIRE SPECIFICATION

HOUSING

The luminaire shall be core cast aluminum. Aluminum shall be certified as pure #356 alloy, free of any porosity, foreign materials or cosmetic fillers. Castings shall be uniform wall thickness with no warping or mold shifting. Minimum wall thickness shall be 3/16". Electrical components are mounted onto the ballast mounting plate. The ballast shall be mounted in the luminaire with two stainless steel screws. The refractor will be an upgraded glass globe with external refractor designed for either a type III or type V light distribution pattern.

ELECTRICAL

All electrical components and materials shall be UL–recognized and wired by a certified UL technician. All Niland ballasts are high power factor rated for –30°C/–20°F starting. Medium base sockets are 4 KV rated. The electrical assembly is prewired with quick disconnects for servicing. Fixture shall be UL certified for wet locations.

MOUNTING

Fixture shall be mounted to a ∅2"O.D. arm and fastened with a S.S. thru bolt and S.S. Set Screws (3 @ 120°)

RELAMPING

To relamp, loosen and remove the 4 ball finials, lift globe ring.

FINISH

Fixture finish shall consist of degreasing, phosphate acid etching with 140°+ deionized water, rinsed, oven dry off and top coated with a thermoset TGIC super polyester powder coat finish designed not to chalk or fade for many years. All Niland Company powders must pass a minimum 3000-hour salt spray test for corrosion resistance.

CERTIFICATION


The Fixture shall be UL-Listed for wet location use, and all HID listings.

WARRANTY

Fixture shall be warranted to be free of defects for five years. Ballast components shall carry the ballast manufacturers limited warranty of two years.

PHOTOMETRICS

Complete photometric data for all fixtures is available in IES-formatted 3.5 disks. A certified independent laboratory performs all testing. Call the Niland Company directly for more information.





Wiland Company

NILAND COMPANY PH: (915) 779-1405 FAX: (915) 779-3618 E-MAIL: INFO@NILANDCO.COM
320 N. Clark El Paso, Tx 79905 PH: 800-648-9013 FAX: 888-779-3065 WEB PAGE: HTTP://www.nilandco.com