



NILES SERIES

NIL-A-PEN-BOR

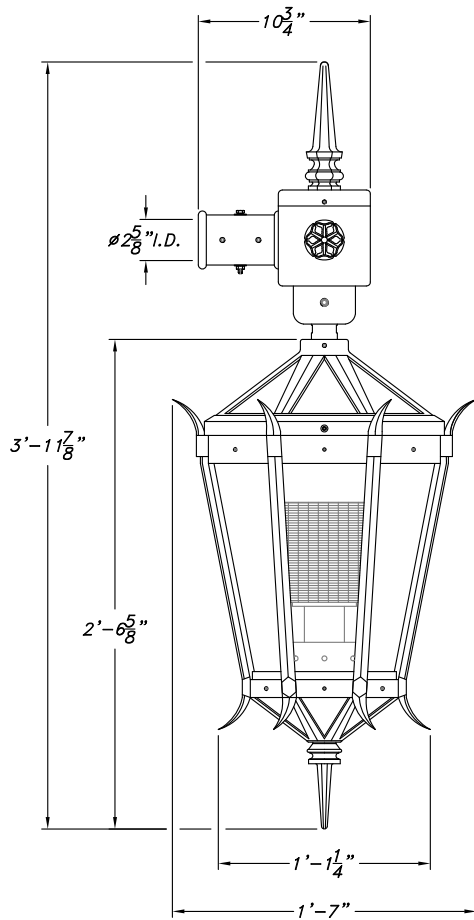

SCALE: 1"=1'-0"

E.P.A.=2.51 SQ.FT.

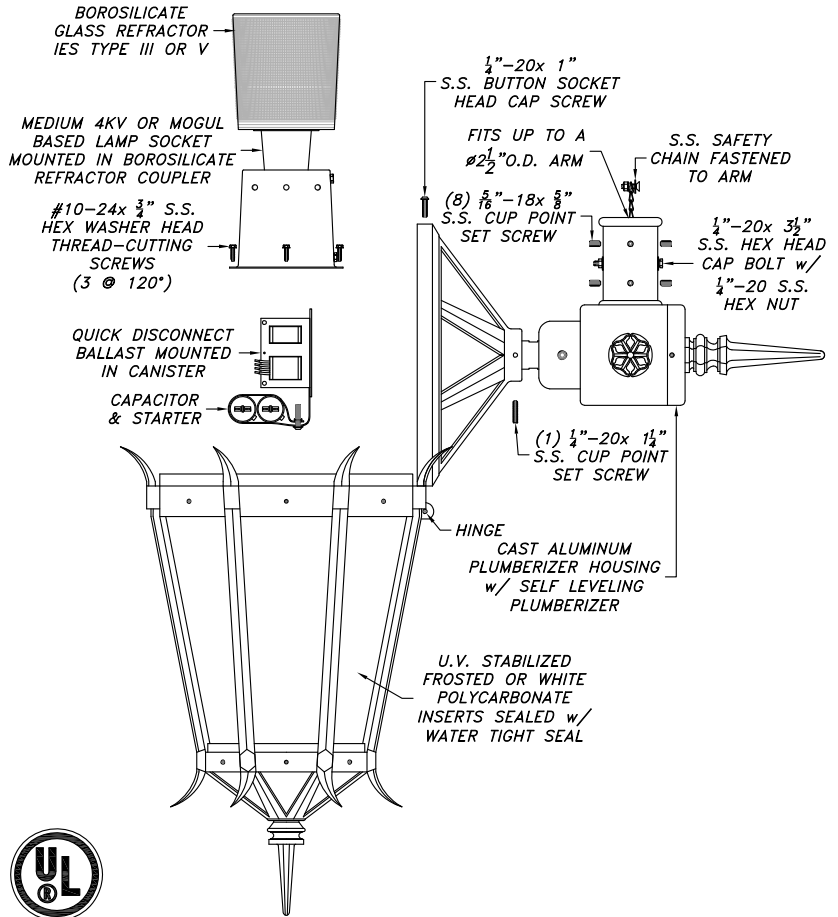

EXAMPLE

NIL-A-PEN-BOR-PSMH-150-208-V-BLK

NIL-A-PEN-BOR-

Series

Ballast

Wattage

Voltage

Distribution

Color

| INSERTS | LIGHT SOURCE | WATTAGE-SOCKET | | VOLTAGE | | LIGHT DISTRIBUTION | COLOR OF POWDER COAT FINISH | |
|--|-------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------------------------|-----------------------------------|---------------------------------------|--|
| <input type="checkbox"/> FROSTED (CLEAR) | <input type="checkbox"/> INC | <input type="checkbox"/> 50w | | <input type="checkbox"/> 120v | <input type="checkbox"/> MULTITAP | <input type="checkbox"/> TYPE III | <input type="checkbox"/> (BLK) BLACK | <input type="checkbox"/> (HG) HAND BRUSHED GREEN |
| <input type="checkbox"/> WHITE (MILKY) | <input type="checkbox"/> CFL | <input type="checkbox"/> 70w | | <input type="checkbox"/> 208v | <input type="checkbox"/> 120v 240v | <input type="checkbox"/> TYPE V | <input type="checkbox"/> (BRZ) BRONZE | <input type="checkbox"/> (HR) HAND BRUSHED GRAY |
| | <input type="checkbox"/> HPS | <input type="checkbox"/> 100w | <input type="checkbox"/> 250w | <input type="checkbox"/> 240v | <input type="checkbox"/> 208v 277v | | <input type="checkbox"/> (GRN) GREEN | <input type="checkbox"/> CUSTOM _____ |
| | <input type="checkbox"/> PSMH | <input type="checkbox"/> 150w | | <input type="checkbox"/> 277v | PLEASE SPECIFY VOLTAGE | | | |
| | <input type="checkbox"/> LED | <input type="checkbox"/> 175w | | <input type="checkbox"/> 480v | | | | |

LUMINAIRE SPECIFICATION

HOUSING

The pendant mount luminaire shall be core cast aluminum. Aluminum shall be certified as pure #356 alloy, free of any porosity, foreign materials or cosmetic fillers. Castings shall be uniform wall thickness with no warping or mold shifting. Minimum wall thickness shall be 3/16". Electrical components are mounted in the ballast canister. The ballast canister shall be mounted in the pendant luminaire with three stainless steel screws. The optional reflector will be borosilicate glass refractor is designed for a Type III or V light distribution pattern.

ELECTRICAL

All electrical components and materials shall be UL-recognized and wired by a certified UL technician. All Niland ballasts are high power factor rated for -30°C/-20°F starting. Medium and Mogul base sockets are 4 KV rated. The electrical assembly is prewired with quick disconnects for servicing. Fixture shall be UL certified for wet locations.

MOUNTING

Fixture shall be mounted to a Self Leveling Plumberizer. Plumberizer shall mount to arm with stainless steel set screws and thru bolt.

RELAMPING

The lamp is accessed by loosening the Button Head Socket Cap Screws that are mounted to hinged luminaire lid.

FINISH

Fixture finish shall consist of degreasing, phosphate acid etching with 140+ deionized water, rinsed, oven dry off and top coated with a thermoset TGIC super polyester powder coat finish designed not to chalk or fade for many years. All Niland Company powders must pass a minimum 3000-hour salt spray test for corrosion resistance.

CERTIFICATION

The Fixture shall be UL-Listed for wet location use, and all HID listings.

WARRANTY

Fixture shall be warranted to be free of defects for five years. Ballast components shall carry the ballast manufacturers limited warranty of two years.

PHOTOMETRICS

Complete photometric data for all fixtures is available in IES-formatted 3.5 disks. A certified independent laboratory performs all testing. Call the Niland Company directly for more information.

Catalog Name: NIL-A-PEN-BOR

Date: 02.15.18

Revision History: N/A

Revision #: 0

Niland Approval: Luis M. Gomez Customer Approval:

Page: 4 of 4



Niland Company

NILAND COMPANY

PH: (915) 779-1405

FAX: (915) 779-3618

E-MAIL: INFO@NILANDCO.COM

320 N. Clark El Paso, Tx 79905

PH: 800-648-9013

FAX: 888-779-3065

WEB PAGE: HTTP://www.nilandco.com