

## GAS LAMP SERIES

GL-BOR

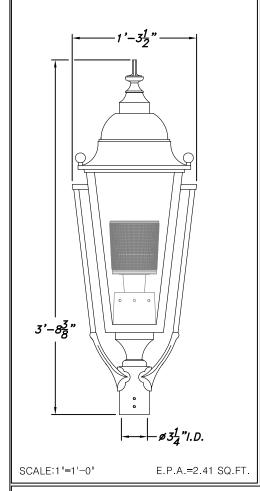

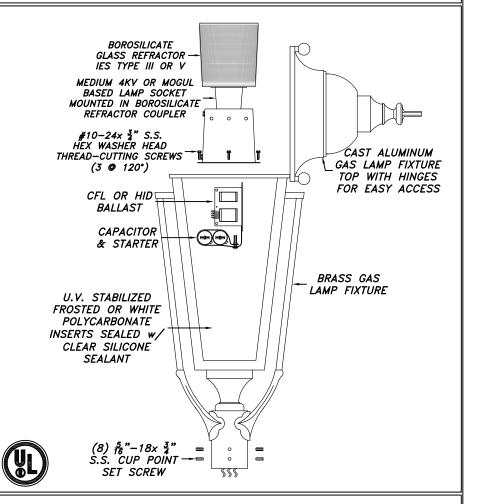

**EXAMPLE** 

GL-BOR-PSMH-150-208-V-BLK

GL-BOR-Series Ballast Wattage Voltage Distribution Color

INSERTS	SOURCE	MEDIUM MOGUL	VOLTAGE	DISTRIBUTION	COLOR OF POWDER COAT FINISH
FROSTED (CLEAR) WHITE (MILKY)	INC CFL HPS PSMH LED	50w 70w 100w 150w 175w	120v	TYPE III	☐ (BLK) BLACK ☐ (HG) HAND BRUSHED GREEN ☐ (BRZ) BRONZE ☐ (HR) HAND BRUSHED GRAY ☐ (GRN) GREEN ☐ CUSTOM ☐

### LUMINAIRE SPECIFICATION

#### HOUSING

The post top shall be core cast aluminum. Aluminum shall be certified as pure #356 alloy, free of any porosity, foreign materials or cosmetic fillers. Castings shall be uniform wall thickness with no warping or mold shifting. Minimum wall thickness shall be 3/16". Electrical components are mounted in the ballast canister. The ballast canister shall be mounted in the post top with three stainless steel screws. The optional refractor will be a borosilicate glass refractor designed for either a type III or type V light distribution pattern.

#### ELECTRICAL

All electrical components and materials shall be UL-recognized and wired by a certified UL technician. All Niland ballasts are high power factor rated for -30°C/-20°F starting. Medium and Mogul base sockets are 4 KV rated. The electrical assembly is prewired with quick disconnects for servicing. Fixture shall be UL certified for wet locations.

#### MOUNTING

Fixture shall be mounted to Ø3"O.D.x3"H. tenon with stainless steel allen head set screws (8 @ 90°)

#### RELAMPING

The lamp is accessed by loosening (2) Flat Head Socket Cap Screws that are mounted to luminaire lid.

#### **FINISH**

Fixture finish shall consist of degreasing, phosphate acid etching with 140°+ deionized water, rinsed, oven dry off and top coated with a thermoset TGIC super polyester powder coat finish designed not to chalk or fade for many years. All Niland Company powders must pass a minimum 3000-hour salt spray test for corrosion resistance.

#### <u>CERTIFICATION</u>

The Fixture shall be UL-Listed for wet location use, and all HID listings.

#### WARRANTY

Fixture shall be warranted to be free of defects for five years. Ballast components shall carry the ballast manufacturers limited warranty of two years.

#### **PHOTOMETRICS**

Complete photometric data for all fixtures is available in IES-formatted 3.5 disks. A certified independent laboratory performs all testing. Call the Niland Company directly for more information.





# **Riland Company**

NILAND COMPANY • PH: (915) 779-1405 • FAX: (915) 779-3618 • E-MAIL: INFO@NILANDCO.COM
320 N. Clark El Paso, Tx 79905 • PH: 800-648-9013 • FAX: 888-779-3065 • WEB PAGE: HTTP://www.nilandco.cc