
# DAVENPORT SERIES

DAV-1

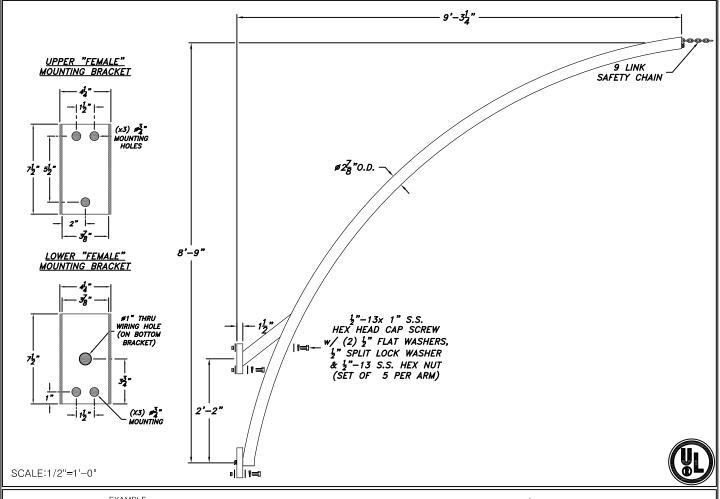

 EXAMPLE
 DAV-\_\_\_1\_\_ 

 DAV-1-BLK
 Series Arms Color

ARM PER POLE

COLOR OF POWDER COAT FINISH

(BLK) BLACK (HG) HAND BRUSHED GREEN

(BRZ) BRONZE (HR) HAND BRUSHED GRAY

(GRN) GREEN CUSTOM CUSTOM

# ARM SPECIFICATION

## ARM

The arms shall be steel construction. Extrusion shall be 11 guage  $(\frac{1}{8}^n)$  wall thickness with no warping or mold shifting. Electrical wiring shall run through arm up and out through the  $\approx 2.5/8^n$  opening.

## ELECTRICAL

All electrical wiring is ran through center shaft and arm and shall be UL-recognized and wired by a certified UL technician. The electrical assembly is prewired with quick disconnects for servicing. Fixture shall be UL certified for wet locations.

# MOUNTING

Arm shall be mounted to a (2)  $3\frac{9}{4}$  W.x  $7\frac{1}{2}$  H.x  $1\frac{1}{2}$  D. arm bracket using (3) steel hex head set screws for fastening.

## FINISH

Fixture finish shall consist of degreasing, phosphate acid etching with 140°+ deionized water, rinsed, oven dry off and top coated with a thermoset TGIC super polyester powder coat finish designed not to chalk or fade for many years. All Niland Company powders must pass a minimum 3000-hour salt spray test for corrosion resistance.

# CERTIFICATION

The Fixture shall be UL-Listed for wet location use, and all HID listings.

## WARRANTY

Fixture shall be warranted to be free of defects for five years. Ballast components shall carry the ballast manufacturers limited warranty of two years.

 Catalog Name:DAV-1
 Date: 02.15.18

 Revision History:N/A
 Revision #: 0

 Niland Approval: Luis M.Gomez Customer Approval;
 Page: 3 of 4



# **Niland Company**

NILAND COMPANY PH: (915) 779-1405 • FAX: (915) 779-3618 • E-MAIL: INFO@NILANDCO.COM
320 N. Clark El Paso, Tx 79905 • PH: 800-648-9013 • FAX: 888-779-3085 • WEB PAGE: HTTP://www.nilandco.com